



**Center for Advanced Research in Photonics
Institute of Optical Science and Technology (IOSAT)
The Chinese University of Hong Kong**

Presents an IEEE LEOS (Hong Kong Chapter) Distinguished Seminar

Date: 12 December (Friday), 2003

Time: 4:45 p. m. – 5.45 p.m

Location: TY Wong Lecture Theatre, 5th Floor Ho Sin Hang Engineering Building, The Chinese University of Hong Kong, Shatin, Hong Kong.

“Photonic crystal fibres: a multi-faceted super-highway for light”

Professor Philip Russell, Dept of Physics, University of Bath, Bath BA2 7AY, UK.

Photonic crystal fibres (PCFs – sometimes also known as “holey” or “microstructured” fibres) have been the focus of increasing scientific and technological interest since the first working example was reported in 1996 [1,2]. Although superficially similar to a conventional optical fibre, PCF has a unique microstructure, consisting of an array of microscopic holes (i.e., channels) running along its entire length. These holes act as optical barriers or scatterers, which suitably arranged can “corral” light within a central core (either hollow or made of solid glass). The holes can range in diameter from ~ 25 nm to ~ 50 μ m. Although most PCF is formed in pure silica glass, it has also recently been made using polymers [3] and non-silica glasses [4], where it is difficult to find compatible core and cladding materials suitable for conventional total internal reflection guidance.

PCF supports two guidance mechanisms: total internal reflection, in which case the core must have a higher average refractive index than the holey cladding; and a two-dimensional photonic bandgap, when the index of the core is uncritical – it can be hollow or filled with material [2]. Light can be controlled and transformed in these fibres with unprecedented freedom, allowing for example the guiding of light in a hollow core, the creation of highly nonlinear solid cores with anomalous dispersion in the visible and the design of fibres that support only one transverse spatial mode at all wavelengths. Applications are emerging in many diverse areas of science and technology.

For example, as first shown by Ranka et al [5], an ultra-small core fibre made from solid glass and surrounded by very large air-holes can be arranged to have a zero chromatic dispersion wavelength in the 800 nm Ti:sapphire band. This fibre produces spectacular spectral broadening of high repetition rate 100 fsec pulses, with a brightness some 10,000 \times brighter than the sun and a similar bandwidth. This source is transforming the fields of optical coherence tomography, spectroscopy and

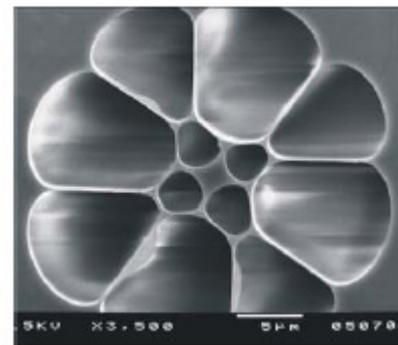


Figure: Extruded SF6 glass fibre for producing a super-continuum out to 2300 nm [4]

frequency metrology [6]. The ability to control dispersion over broad bands of wavelengths is ushering in a new era in nonlinear optics [7,8]. Recently a record-breaking supercontinuum spectrum, extending out to 2300 nm, has been demonstrated in a SF6 glass fibre (see Figure). In its hollow core form [9], PCF also solves a key long-standing challenge in photonics, for which there is no good conventional solution: How to force light to interact – strongly, reproducibly and over long path-lengths – with low-density materials such as gases, vapours and liquids. This is an exciting development with major implications for numerous gas-based nonlinear optical and laser devices. Recently a hydrogen Raman cell was demonstrated [10] with a threshold energy of 800 nJ – some 100× lower than previously reported. In September 2002, breakthrough losses of 13 dB/km were reported in hollow-core photonic bandgap fibre [11], and MW soliton propagation explored [12]. Fully characterised hollow core PCF is now commercially available with losses below 0.1 dB/m [13].

These examples illustrate how the PCF concept is ushering in a new and more versatile era of fibre optics, with a multitude of different applications spanning many areas of science and technology.

1. J.C. Knight et al., *Opt. Lett.* **21** (1547-1549) 1996; Erratum, **22** (484-485) 1997
2. P.St.J. Russell, *Science* **299** (358-362) 2003
3. M.A. van Eijkelenborg et al., *Opt. Exp.* **9** (319-327) 2001
4. V. V. Ravi Kanth Kumar et al., *Opt. Exp.* **10** (1520-1525) 2002
5. J.K. Ranka, R.S. Windeler and A.J. Stentz, *Opt. Lett.* **25** (25-27) 2000
6. R. Holzwarth et al., *Phys. Rev. Lett.* **85** (2264-2267) 2000
7. W. Reeves et al., *Nature* **424** (511-515) 2003
8. D.V. Skryabin et al., *Science* **301** (1705-1708) 2003
9. R. F. Cregan et al., *Science* **285** (1537-1539) 1999
10. F. Benabid et al., *Science* **298** (399-402) 2002
11. C.M. Smith et al., *Nature* **424** (657-659) 2003
12. D.G. Ouzounov et al., *Science* **301** (1702-1704) 2003
13. www.blazephotonics.

About the Speaker

Philip Russell is Professor in the Department of Physics at the University of Bath, where he heads the Optoelectronics Group. Previously he worked in universities and research laboratories across Europe and in the USA. He has 25 years experience (and over 300 publications) in many aspects of photonics and has helped pioneer a number of developments in fibre gratings, photonic band gap materials, acousto-optic fibre devices, nonlinear optics and periodically poled materials. He is the founding chair of the Optical Society of America's Topical Meeting Series on Bragg Gratings, Photosensitivity and Poling in Glass. He is a Fellow of the Optical Society of America and in 2000 won its Joseph Fraunhofer Award/Robert M. Burley Prize for his invention of photonic crystal ("holey") fibre. In 2002 he won the Applied Optics Division Prize of the Institute of Physics. His work on photonic crystals (both in films and fibres) is recognised by a continuing series of plenary, keynote and invited talks at conferences and summer schools all over the world.

All are welcome to attend the seminar. For further information please contact: Professor H.K.Tsang, Department of Electronic Engineering, The Chinese University of Hong Kong. Tel. 26098254, email hktsang@ee.cuhk.edu.hk